




**Technical Data**

# LIGATURE RESISTANT RECESSED SHELF

# B-9883

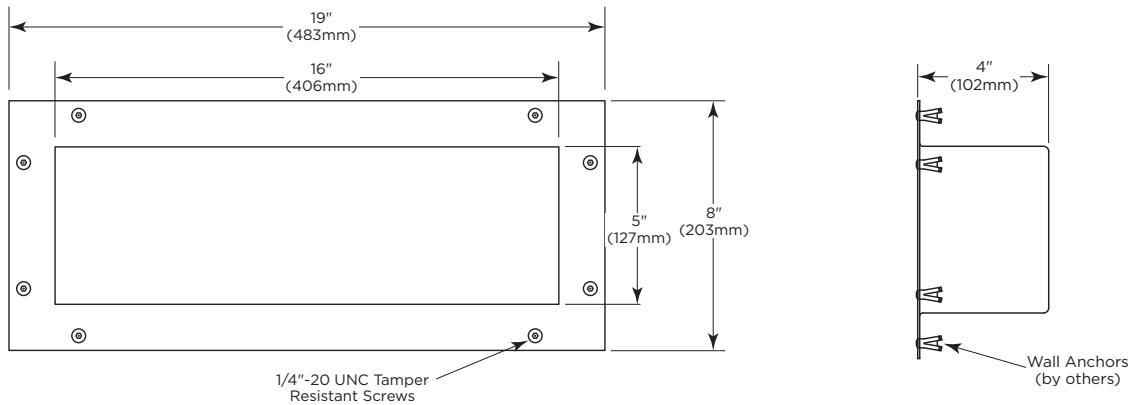

## MATERIALS:

ReCESSED Shelf is constructed of 16-gauge, type 304 stainless steel with exposed surfaces powder coated in white.

## INSTALLATION:

Installation requires a rough wall opening approximately 16-1/2" x 5-1/2" and 4-1/4" deep to accommodate recessed shelf. Using recessed shelf as a template, locate mounting points. Drill holes for wall anchors (by others). Install anchors. Secure paper holder to wall using 1/4"-20 UNC screws.

## SPECIFICATION:

Shelf is furnished with eight (8) 1/4"-20 UNC tamper-resistant hex screws and one (1) 5/32" hex bit for center reject pin ;wall anchors to be provided by installer.

**Ligature Resistant ReCESSED Shelf shall be Model B-9883 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**