



FRONT

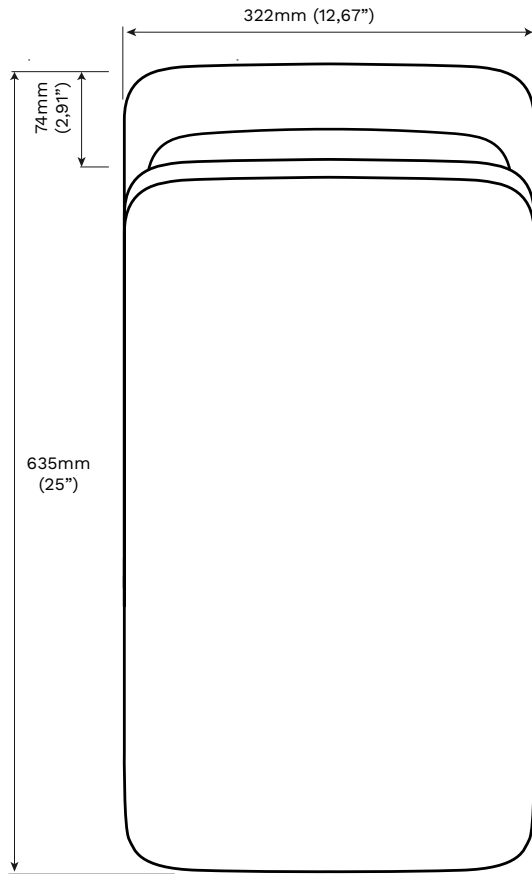

LATERAL

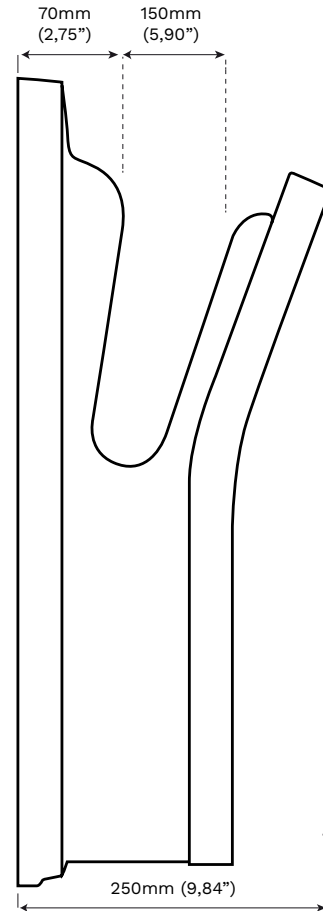

Electric system

Input voltage:	220 - 240 V	120 V
Frequency:	50/60 Hz	60 Hz
Potencia nominal:	1100 W	1100 W
Electric current:	5A	9A
Type of motor:	Universal con Preheat*	Universal con Preheat*
Motor speed	23000 RPM	21500 RPM
Working temperature:	40°C/104°F	40°C/104°F

* Patented by ffuuss™ Available on ffuuss one Premium models.

Manufacturing

Cover material:	ABS
Treated with Biomaster Silver Ions antibacterial additive	
Acabado:	Various colors
Mounting mooring:	Galvanized steel
Water inlet protection:	IPX2
Filter:	HEPA H13

Standard warranty

5 years for parts and 1 year for labour (see conditions)
--

Operation

Approx hand drying time:	13-15 seconds
Blocking time:	25 seconds
Airflow:	Up to 73 l/s (19,3 gal/s)
Automatic activation	

Logistics

Net weight:	7.7 Kg (16,2 lb)
Assembled weight:	9.2 Kg (20,5 lb)
Box dimensions:	690mm / 360mm / 285mm (H27,16" W14,17" D11,22")

Regulations

This device complies with the following standards:
 2014/53/EU 2014/30/EU 2014/35/EU 2012/19/EU
 2011/65/EU 1275/2008.2009/125/EU
 UL 499 CSA-C22.2 No. 36-08
 IEC 60825-1 Ed.3 (2014)



Others

This unit has Bluetooth technology
 Product Laser Classe 1

NOTE: ffuuss™ reserves the right to make changes without prior notice

For more information, visit ffuuss.com or call +34 973 481 900